



The omni directional ceiling antenna covers 698-4200MHz frequency band with N-female connector interface. Benefitted by the flat appearance design and excellent pattern performance, it is widely used for in-building mobile coverages.

General Specifications

Product Type	Omni directional
Ports	2-port MIMO
Connector Interface	N female
Mounting	Ceiling mounting
Radome Shape	Flat

Electrical Specifications

Frequency Band (MHz)	698-806	806-960	1710-2700	3300-4200
Gain (dBi)	2.2±0.5	3.5±0.5	4.0±1.0	5.0±1.0
Horizontal Beamwidth	360°	360°	360°	360°
Vertical Beamwidth	75±15°	60±15°	50±15°	40±15°
Port Isolation	≥16dB	≥16dB	≥20dB	≥20dB
VSWR	≤1.8			
Polarization	Linear×2			
Power Handling	50W			
Intermodulation, 2×33dBm	≤-153dBc			
Impedance	50 ohms			

Mechanical Specifications

Dimension	φ217×42 mm
Weight	0.6 kg
Pigtail Length	300 mm
Connectors Type	N female
Radome Material	ABS
Radome Color	White
Mounting	Ceiling mounting
Packing	1pcs in box


Environmental Specifications

Installation Temperature	-10 °C to +55 °C
Operating Temperature	-20 °C to +65 °C
Storage Temperature	-45 °C to +85 °C
Relative Humidity	5% - 95%
Application	Indoor
IP Rating	IP54

Patterns

698-960 MHz

1710-4200 MHz

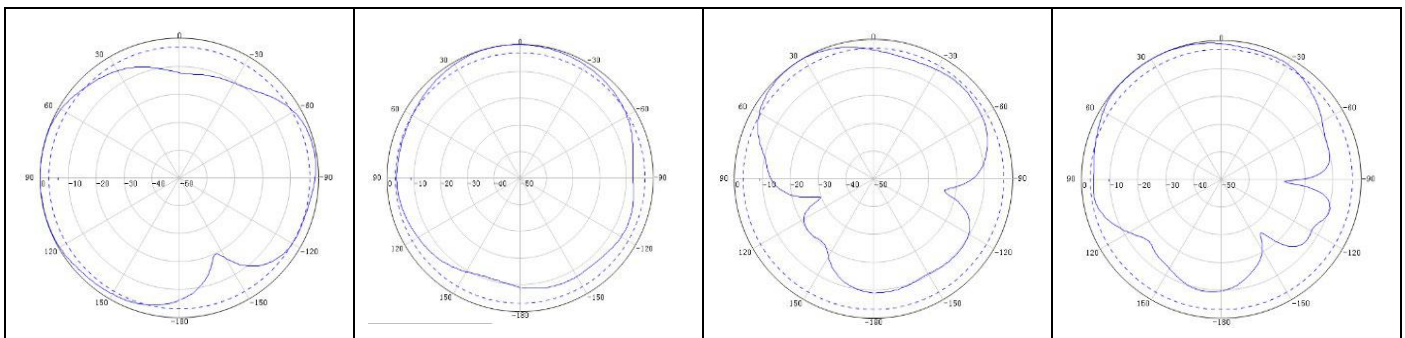

Horizontal Pattern

Vertical Pattern

Horizontal Pattern

Vertical Pattern

Regulatory Compliances

ISO 9001:2015	Compliant
ROHS	Compliant
China RoHS	Compliant
UK RoHS	Compliant
REACH	Compliant
EU/CE	Compliant

In the effort to improve our products, we reserve the right to make changes judged to be necessary. While the information has been carefully compiled to the best of our knowledge, but nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. The information contained in this document is subject to change without notice.