## MBC2D-AP-43F-D01





Multi-band RF combiner, diplexer, 1710-1755/2110-2155MHz and 1850-1990MHz, double unit 4-input / 2-output, 4.3-10 female, -155dBc, DC bypass for all ports.

#### **General Specifications**

Product Type	Multi-Band Combiner
Channel Number	2-way Diplexer
Frequency Band	1710-1755/2110-2155MHz   1850-1990MHz
Input / Output	4-input and 2-output
Structure	Double Unit
Connector Interface	4.3-10 female

## **Electrical Specifications**

990		
dB		
3		
6		
≤-155dBc@2×43dBm		
DC bypass for all ports		

## **Material Specifications**

Cavity	Cavity Enclosure	Aluminum alloy
	Cavity Outer Surface Treatment	Powder coating
	Cavity Inner Surface Treatment	Cu3Ag1
	Inner Conductor	Aluminum alloy
	Inner Conductor Surface Treatment	Ag1
Connector	Outer Conductor	Brass
	Outer Conductor Surface Treatment	Tri-metal CuSnZn3
	Inner Conductor	Brass
	Inner Conductor Surface Treatment	Ag1
	Insulator	PTFE/TPX
	Gasket	Silicon rubber




#### **Mechanical Specifications**

Dimension	189×185×106 (mm, excluding connectors and brackets)
Weight	7.5 kg
Connectors Type	4.3-10 female
Mounting	Wall and pole
Packing	1pcs in box

# **Environmental Specifications**

Operating Temperature	-40 °C to +65 °C
Storage Temperature	-45 °C to +85 °C
Relative Humidity	5% - 95%
Application	IP67

## **Outline Drawing**

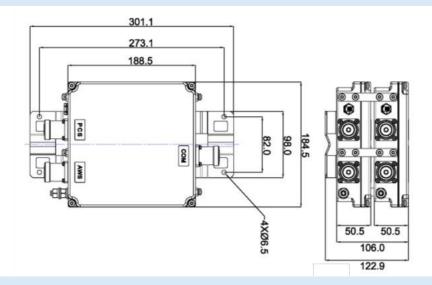

## **Regulatory Compliances**

ISO 9001:2015	Compliant
ROHS	Compliant
China RoHS	Compliant
UK RoHS	Compliant
REACH	Compliant
EU/CE	Compliant

In the effort to improve our products, we reserve the right to make changes judged to be necessary. While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. The information contained in this document is subject to change without notice.