



Multi-band RF combiner, diplexer, 2500-2570/2620-2690MHz and 2575-2615MHz, single unit 2-input / 1-output, 4.3-10 female, -160dBc, DC bypass for all ports.

### **General Specifications**

Product Type Multi-Band Combiner

Channel Number 2-way Diplexer

Frequency Band 2500-2570/2620-2690MHz | 2575-2615MHz

Input / Output 2-input and 1-output

Structure Single Unit
Connector Interface 4.3-10 female

#### **Electrical Specifications**

 Frequency Band (MHz)
 2500-2570/2620-2690 2575-2615 

 Return Loss
 ≤-20.8 dB
 ≤-20.8 dB

 VSWR
 ≤1.20
 ≤1.20

 Insertion Loss
 ≤0.5 dB
 ≤0.5 dB

 Isolation
 ≥50 dB
 ≥50 dB

Intermodulation (3rd order) ≤-160dBc@2×43dBm

DC Bypass DC bypass for all ports

Power Handling 200 watts per port

Impedance 50 ohms

## **Material Specifications**

Cavity Cavity Enclosure Aluminum alloy

Cavity Outer Surface Treatment Powder coating

Cavity Inner Surface Treatment Cu3Ag1

Inner Conductor Aluminum alloy

Inner Conductor Surface Treatment Ag1

Connector Outer Conductor Brass

Outer Conductor Surface Treatment Tri-metal CuSnZn3

Inner Conductor Brass

Inner Conductor Surface Treatment Ag1
Insulator PTFE/TPX

Gasket Silicon rubber



### **Mechanical Specifications**

Dimension 178×241×52 (mm, excluding connectors and brackets)


Weight 1.9 kg

Connectors Type 4.3-10 female
Mounting Wall and pole
Packing 1pcs in box

### **Environmental Specifications**

Operating Temperature  $-40 \,^{\circ}\text{C}$  to  $+65 \,^{\circ}\text{C}$  Storage Temperature  $-45 \,^{\circ}\text{C}$  to  $+85 \,^{\circ}\text{C}$  Relative Humidity 5% - 95% Application IP67

#### **Outline Drawing**

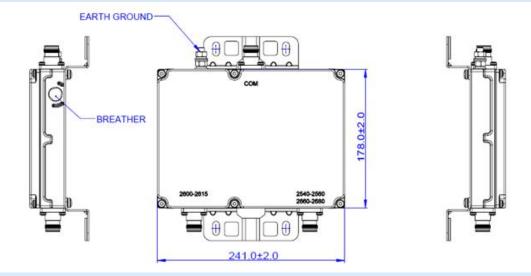

# **Regulatory Compliances**

ISO 9001:2015 Compliant
ROHS Compliant
China RoHS Compliant
UK RoHS Compliant
REACH Compliant
EU/CE Compliant

In the effort to improve our products, we reserve the right to make changes judged to be necessary. While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. The information contained in this document is subject to change without notice.