



Multi-band RF combiner, triplexer, 694-806MHz/824-880MHz/890-960MHz combination, double unit 6-input / 2-output, 7/16 DIN female, -160dBc, DC bypass for all ports.

General Specifications

Product Type Multi-Band Combiner

Channel Number 3-way Triplexer

Frequency Band 694-806MHz | 824-880MHz | 890-960MHz

Input / Output 6-input and 2-output

Structure Double Unit
Connector Interface 7/16 DIN female

Electrical Specifications

694-806 824-880 890-960 Frequency Band (MHz) Return Loss ≤-20.8 dB ≤-20.8 dB ≤-20.8 dB **VSWR** ≤1.20 ≤1.20 ≤1.20 **Insertion Loss** ≤0.5 dB ≤0.5 dB ≤0.5 dB Isolation ≥50 dB ≥50 dB ≥50 dB

Intermodulation (3rd order) ≤-160dBc@2×43dBm

DC Bypass DC bypass for all ports

Power Handling 200 watts per port

Impedance 50 ohms

Material Specifications

Cavity Cavity Enclosure Aluminum alloy
Cavity Outer Surface Treatment Powder coating

Cavity Inner Surface Treatment Cu3Ag1

Inner Conductor Aluminum alloy

Inner Conductor Surface Treatment Ag1

Connector Outer Conductor Brass

Outer Conductor Surface Treatment Tri-metal CuSnZn3

Inner Conductor Brass
Inner Conductor Surface Treatment Aq1

Inner Conductor Surface Treatment Ag1
Insulator PTFE/TPX

Gasket Silicon rubber



Mechanical Specifications

Dimension 187×176×115 (mm, excluding connectors and brackets)


Weight 6.5 kg

Connectors Type 7/16 DIN female
Mounting Wall and pole
Packing 1pcs in box

Environmental Specifications

Operating Temperature $-40 \,^{\circ}\text{C}$ to $+65 \,^{\circ}\text{C}$ Storage Temperature $-45 \,^{\circ}\text{C}$ to $+85 \,^{\circ}\text{C}$ Relative Humidity 5% - 95% Application IP67

Outline Drawing

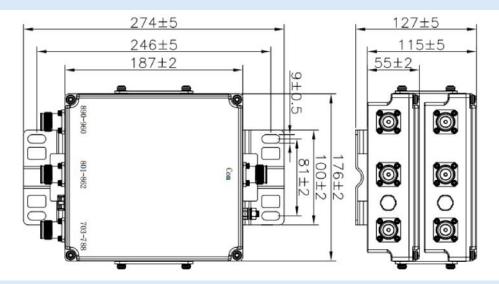

Regulatory Compliances

ISO 9001:2015 Compliant
ROHS Compliant
China RoHS Compliant
UK RoHS Compliant
REACH Compliant
EU/CE Compliant

In the effort to improve our products, we reserve the right to make changes judged to be necessary. While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. The information contained in this document is subject to change without notice.